


BLIND FLANGES

150 Lbs

ANSI / ASME B 16.5

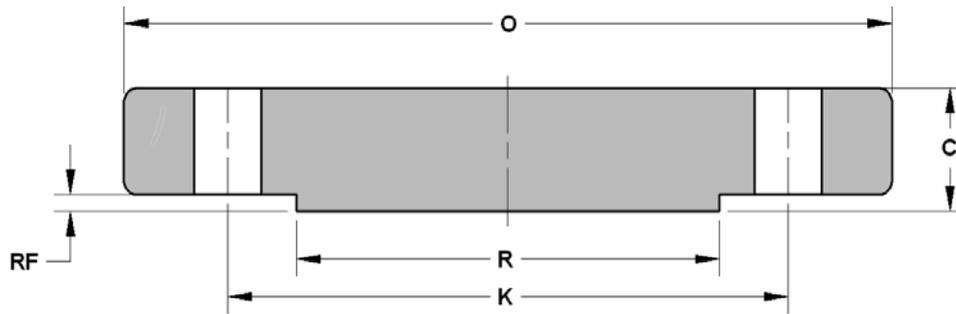

Dimensions are in mm.

Cod.	DN	O	C	K	RF	R	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSBL15021	1/2	88.9	11.1	60.4	1.5	35.0	15.7	4	0.4
FSBL15027	3/4	98.5	12.7	69.8	1.5	42.9	15.7	4	0.7
FSBL15033	1"	107.9	14.2	79.2	1.5	50.8	15.7	4	0.9
FSBL15042	1" 1/4	117.3	15.7	88.9	1.5	63.5	15.7	4	1.3
FSBL15048	1" 1/2	127.0	17.5	98.5	1.5	73.1	15.7	4	1.6
FSBL15060	2"	152.4	19.0	120.6	1.5	91.9	19.0	4	2.6
FSBL15073	2" 1/2	177.8	22.3	139.7	1.5	104.6	19.0	4	4.1
FSBL15089	3"	190.5	23.8	152.4	1.5	127.0	19.0	4	5.0
FSBL15114	4"	228.6	23.8	190.5	1.5	157.2	19.0	8	7.1
FSBL15141	5"	254.0	23.8	215.9	1.5	185.6	22.3	8	9.0
FSBL15168	6"	279.4	25.4	241.3	1.5	215.9	22.3	8	11.8
FSBL15219	8"	342.9	28.4	298.4	1.5	269.7	22.3	8	21.0
FSBL15273	10"	406.4	30.2	361.9	1.5	323.8	25.4	12	30.0
FSBL15323	12"	482.6	31.7	431.8	1.5	381.0	25.4	12	45.0
FSBL15355	14"	533.4	35.0	476.2	1.5	412.7	28.4	12	59.0
FSBL15406	16"	596.9	36.5	539.7	1.5	469.9	28.4	16	79.0
FSBL15455	18"	635.0	39.6	577.8	1.5	533.4	31.7	16	97.0
FSBL15508	20"	698.5	42.9	635.0	1.5	584.2	31.7	20	124.0
FSBL15609	24"	812.8	47.7	749.3	1.5	692.1	35.0	20	188.0