


BLIND FLANGES

1500 Lbs

ANSI / ASME B 16.5

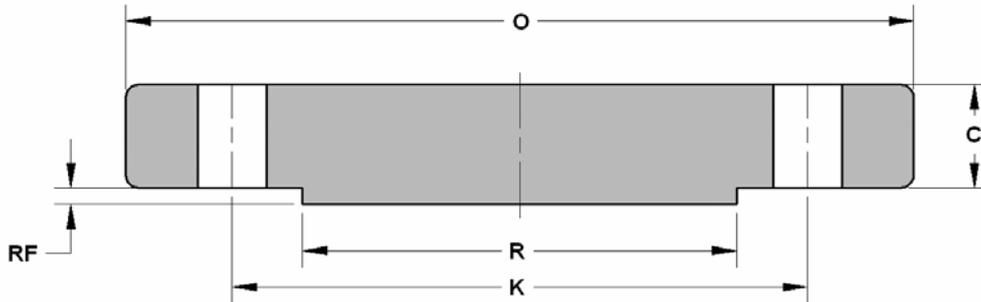

Dimensions are in mm.

Cod.	DN	O	C	K	RF	R	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSBL1500021	1/2	120.6	22.3	82.5	6.3	35.0	22.3	4	1.8
FSBL1500027	3/4	130.0	25.4	88.9	6.3	42.9	22.3	4	2.4
FSBL1500033	1"	149.3	28.4	101.6	6.3	50.8	25.4	4	3.6
FSBL1500042	1"1/4	158.7	28.4	111.2	6.3	63.5	25.4	4	4.1
FSBL1500048	1"1/2	177.8	31.7	123.9	6.3	73.1	28.4	4	5.8
FSBL1500060	2"	215.9	38.1	165.1	6.3	91.9	25.4	8	10.1
FSBL1500073	2"1/2	244.3	41.1	190.5	6.3	104.6	28.4	8	14.0
FSBL1500089	3"	266.7	47.7	203.2	6.3	127.0	31.7	8	19.0
FSBL1500114	4"	311.1	53.8	241.3	6.3	157.2	35.0	8	30.0
FSBL1500141	5"	374.6	73.1	292.1	6.3	185.6	41.1	8	58.0
FSBL1500168	6"	393.7	82.5	317.5	6.3	215.9	38.1	12	72.0
FSBL1500219	8"	482.6	91.9	393.7	6.3	269.7	44.4	12	122.0
FSBL1500273	10"	584.2	107.9	482.6	6.3	323.8	50.8	12	210.0
FSBL1500323	12"	673.1	123.9	571.5	6.3	381.0	53.8	16	315.0
FSBL1500355	14"	749.3	133.3	635.0	6.3	412.7	60.4	16	423.0
FSBL1500406	16"	825.5	146.0	704.8	6.3	469.9	66.5	16	590.0
FSBL1500455	18"	914.4	162.0	774.7	6.3	533.4	73.1	16	795.0
FSBL1500508	20"	984.2	177.8	831.8	6.3	584.2	79.2	16	1030.0
FSBL1500609	24"	1168.4	203.2	990.6	6.3	692.1	91.9	16	1650.0