


BLIND FLANGES

300 Lbs

ANSI / ASME B 16.5

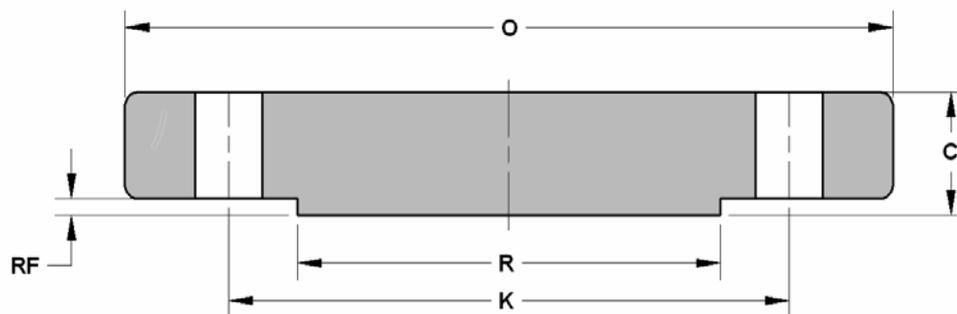

Dimensions are in mm.

Cod.	DN	O	C	K	RF	R	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSBL30021	1/2	95.2	14.2	66.5	1.5	35.0	15.7	4	0.7
FSBL30027	3/4	117.3	15.7	82.5	1.5	42.9	19.0	4	1.2
FSBL30033	1"	123.9	17.5	88.9	1.5	50.8	19.0	4	1.5
FSBL30042	1"1/4	133.3	19.0	98.5	1.5	63.5	19.0	4	2.0
FSBL30048	1"1/2	155.4	20.5	114.3	1.5	73.1	22.3	4	2.9
FSBL30060	2"	165.1	22.3	127.0	1.5	91.9	19.0	8	3.4
FSBL30073	2"1/2	190.5	25.4	149.3	1.5	104.6	22.3	8	5.1
FSBL30089	3"	209.5	28.4	168.1	1.5	127.0	22.3	8	7.0
FSBL30114	4"	254.0	31.7	200.1	1.5	157.2	22.3	8	11.8
FSBL30141	5"	279.4	35.0	234.9	1.5	185.6	22.3	8	15.5
FSBL30168	6"	317.4	36.5	269.7	1.5	215.9	22.3	12	21.3
FSBL30219	8"	381.0	41.1	330.2	1.5	269.7	25.4	12	35.2
FSBL30273	10"	444.5	47.7	387.3	1.5	323.8	28.4	16	57.0
FSBL30323	12"	520.7	50.8	450.8	1.5	381.0	31.7	16	82.0
FSBL30355	14"	584.2	53.8	514.3	1.5	412.7	31.7	20	106.0
FSBL30406	16"	647.7	57.1	571.5	1.5	469.9	35.0	20	140.0
FSBL30455	18"	711.2	60.4	628.6	1.5	533.4	35.0	24	178.0
FSBL30508	20"	774.7	63.5	685.8	1.5	584.2	35.0	24	223.0
FSBL30609	24"	914.4	69.8	812.8	1.5	692.1	41.1	24	345.0