


# BLIND FLANGES

600 Lbs

ANSI / ASME B 16.5

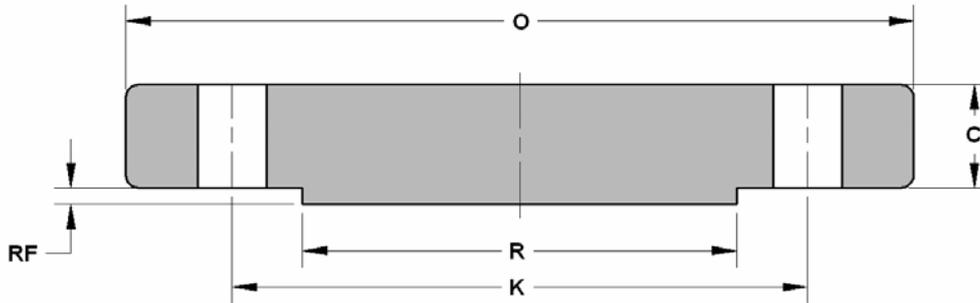

Dimensions are in mm.

| Cod.      | DN     | O     | C     | K     | RF  | R     | Ø FORI HOLES | N. FORI HOLES | Kg. APPROX |
|-----------|--------|-------|-------|-------|-----|-------|--------------|---------------|------------|
| FSBL60021 | 1/2    | 95.2  | 14.2  | 66.5  | 6.3 | 35.0  | 15.7         | 4             | 0.7        |
| FSBL60027 | 3/4    | 117.3 | 15.7  | 82.5  | 6.3 | 42.9  | 19.0         | 4             | 1.2        |
| FSBL60033 | 1"     | 123.9 | 17.5  | 88.9  | 6.3 | 50.8  | 19.0         | 4             | 1.5        |
| FSBL60042 | 1" 1/4 | 133.3 | 20.5  | 98.5  | 6.3 | 63.5  | 19.0         | 4             | 2.0        |
| FSBL60048 | 1" 1/2 | 155.4 | 22.3  | 114.3 | 6.3 | 73.1  | 22.3         | 4             | 3.2        |
| FSBL60060 | 2"     | 165.1 | 25.4  | 127.0 | 6.3 | 91.9  | 19.0         | 8             | 4.3        |
| FSBL60073 | 2" 1/2 | 190.5 | 28.4  | 149.3 | 6.3 | 104.6 | 22.3         | 8             | 6.0        |
| FSBL60089 | 3"     | 209.5 | 31.7  | 168.1 | 6.3 | 127.0 | 22.3         | 8             | 8.0        |
| FSBL60114 | 4"     | 273.0 | 38.1  | 215.9 | 6.3 | 157.2 | 25.4         | 8             | 18.0       |
| FSBL60141 | 5"     | 330.2 | 44.4  | 266.7 | 6.3 | 185.6 | 28.4         | 8             | 28.5       |
| FSBL60168 | 6"     | 355.6 | 47.7  | 292.1 | 6.3 | 215.9 | 28.4         | 12            | 35.5       |
| FSBL60219 | 8"     | 419.1 | 55.6  | 349.2 | 6.3 | 269.7 | 31.7         | 12            | 58.0       |
| FSBL60273 | 10"    | 508.0 | 63.5  | 431.8 | 6.3 | 323.8 | 35.0         | 16            | 98.0       |
| FSBL60323 | 12"    | 558.8 | 66.5  | 488.9 | 6.3 | 381.0 | 35.0         | 20            | 125.0      |
| FSBL60355 | 14"    | 603.2 | 69.8  | 527.0 | 6.3 | 412.7 | 38.1         | 20            | 151.0      |
| FSBL60406 | 16"    | 685.8 | 76.2  | 603.2 | 6.3 | 469.9 | 41.1         | 20            | 215.0      |
| FSBL60455 | 18"    | 742.9 | 82.5  | 654.0 | 6.3 | 533.4 | 44.4         | 20            | 287.0      |
| FSBL60508 | 20"    | 812.8 | 88.9  | 723.9 | 6.3 | 584.2 | 44.4         | 24            | 366.0      |
| FSBL60609 | 24"    | 939.8 | 101.6 | 838.2 | 6.3 | 692.1 | 50.8         | 24            | 532.0      |