


SLIP ON FLANGES

300 Lbs

ANSI / ASME B 16.5

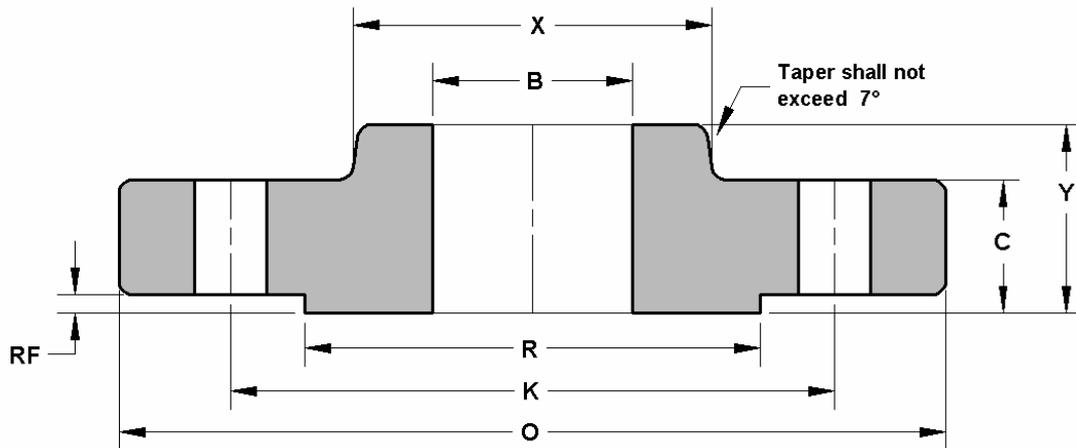

Dimensions are in mm.

Cod.	DN	O	C	X	K	Y	RF	R	B	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSSO30021	1/2	95.2	14.2	38.1	66.5	22.3	1.5	35.0	22.3	15.7	4	0.7
FSSO30027	3/4	117.3	15.7	47.7	82.5	25.4	1.5	42.9	27.6	19.0	4	1.1
FSSO30033	1"	123.9	17.5	53.8	88.9	26.9	1.5	50.8	34.5	19.0	4	1.4
FSSO30042	1" 1/4	133.3	19.0	63.5	98.5	26.9	1.5	63.5	43.1	19.0	4	1.8
FSSO30048	1" 1/2	155.4	20.5	69.8	114.3	30.2	1.5	73.1	49.5	22.3	4	2.6
FSSO30060	2"	165.1	22.3	84.0	127.0	33.2	1.5	91.9	61.9	19.0	8	3.4
FSSO30073	2" 1/2	190.5	25.4	100.0	149.3	38.1	1.5	104.6	74.6	22.3	8	4.4
FSSO30089	3"	209.5	28.4	117.3	168.1	42.9	1.5	127.0	90.6	22.3	8	6.1
FSSO30114	4"	254.0	31.7	146.0	200.1	47.7	1.5	157.2	116.0	22.3	8	10.1
FSSO30141	5"	279.4	35.0	177.8	234.9	50.8	1.5	185.6	143.7	22.3	8	12.5
FSSO30168	6"	317.5	36.5	206.2	269.7	52.3	1.5	215.9	170.6	22.3	12	14.1
FSSO30219	8"	381.0	41.1	260.3	330.2	61.9	1.5	269.7	221.4	25.4	12	24.6
FSSO30273	10"	444.5	47.7	320.5	387.3	66.5	1.5	323.8	276.3	28.4	16	37.1
FSSO30323	12"	520.7	50.8	374.6	450.8	73.1	1.5	381.0	327.1	31.7	16	50.0
FSSO30355	14"	584.2	53.8	425.4	514.3	76.2	1.5	412.7	359.1	31.7	20	70.0
FSSO30406	16"	647.7	57.1	482.6	571.5	82.5	1.5	469.9	410.4	35.0	20	90.0
FSSO30455	18"	711.2	60.4	533.4	628.6	88.9	1.5	533.4	461.7	35.0	24	112.0
FSSO30508	20"	774.7	63.5	587.2	685.8	95.2	1.5	584.2	513.0	35.0	24	133.0
FSSO30609	24"	914.4	69.8	701.5	812.8	106.4	1.5	692.1	615.9	41.1	24	208.0