


# SLIP ON FLANGES

# 600 Lbs

## ANSI / ASME B 16.5

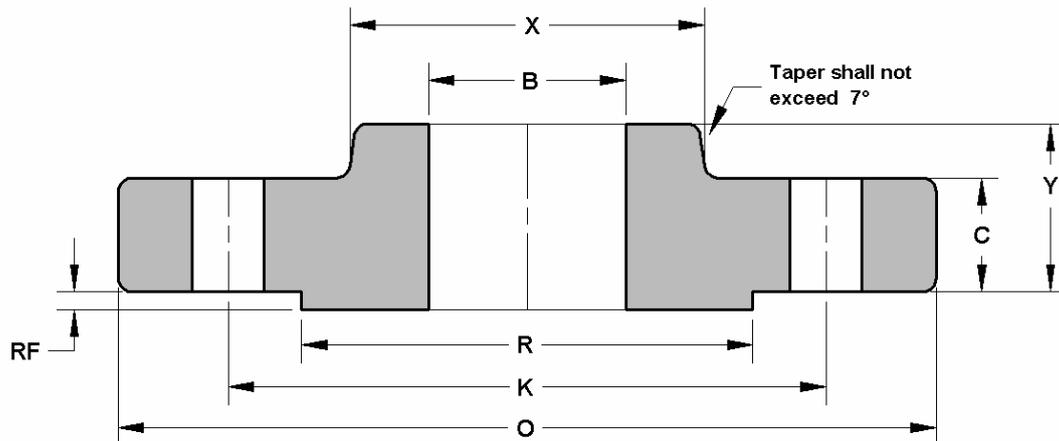

Dimensions are in mm.

| Cod.      | DN     | O     | C     | X     | K     | Y     | RF  | R     | B     | Ø FORI HOLES | N. FORI HOLES | Kg. APPROX |
|-----------|--------|-------|-------|-------|-------|-------|-----|-------|-------|--------------|---------------|------------|
| FSSO60021 | 1/2    | 95.2  | 14.2  | 38.1  | 66.5  | 22.3  | 6.3 | 35.0  | 22.3  | 15.7         | 4             | 0.8        |
| FSSO60027 | 3/4    | 117.3 | 15.7  | 47.7  | 82.5  | 25.4  | 6.3 | 42.9  | 27.6  | 19.0         | 4             | 1.4        |
| FSSO60033 | 1"     | 123.9 | 17.5  | 53.8  | 88.9  | 26.9  | 6.3 | 50.8  | 34.5  | 19.0         | 4             | 1.6        |
| FSSO60042 | 1" 1/4 | 133.3 | 20.5  | 63.5  | 98.5  | 28.4  | 6.3 | 63.5  | 43.1  | 19.0         | 4             | 2.1        |
| FSSO60048 | 1" 1/2 | 155.4 | 22.3  | 69.8  | 114.3 | 31.7  | 6.3 | 73.1  | 49.5  | 22.3         | 4             | 3.1        |
| FSSO60060 | 2"     | 165.1 | 25.4  | 84.0  | 127.0 | 36.5  | 6.3 | 91.9  | 61.9  | 19.0         | 8             | 3.7        |
| FSSO60073 | 2" 1/2 | 190.5 | 28.4  | 100.0 | 149.3 | 41.1  | 6.3 | 104.6 | 74.6  | 22.3         | 8             | 5.4        |
| FSSO60089 | 3"     | 209.5 | 31.7  | 117.3 | 168.1 | 45.9  | 6.3 | 127.0 | 90.6  | 22.3         | 8             | 7.3        |
| FSSO60114 | 4"     | 273.0 | 38.1  | 152.4 | 215.9 | 53.8  | 6.3 | 157.2 | 116.0 | 25.4         | 8             | 15.8       |
| FSSO60141 | 5"     | 330.2 | 44.4  | 188.9 | 266.7 | 60.4  | 6.3 | 185.6 | 143.7 | 28.4         | 8             | 24.5       |
| FSSO60168 | 6"     | 355.6 | 47.7  | 222.2 | 292.1 | 66.5  | 6.3 | 215.9 | 170.6 | 28.4         | 12            | 29.5       |
| FSSO60219 | 8"     | 419.1 | 55.6  | 273.0 | 349.2 | 76.2  | 6.3 | 269.7 | 221.4 | 31.7         | 12            | 43.0       |
| FSSO60273 | 10"    | 508.0 | 63.5  | 342.9 | 431.8 | 85.8  | 6.3 | 323.8 | 276.3 | 35.0         | 16            | 70.0       |
| FSSO60323 | 12"    | 558.8 | 66.5  | 400.0 | 488.9 | 91.9  | 6.3 | 381.0 | 327.1 | 35.0         | 20            | 86.0       |
| FSSO60355 | 14"    | 603.2 | 69.8  | 431.8 | 527.0 | 93.7  | 6.3 | 412.7 | 359.1 | 38.1         | 20            | 100.0      |
| FSSO60406 | 16"    | 685.8 | 76.2  | 495.3 | 603.2 | 106.4 | 6.3 | 469.9 | 410.4 | 41.1         | 20            | 142.0      |
| FSSO60455 | 18"    | 742.9 | 82.5  | 546.1 | 654.0 | 117.3 | 6.3 | 533.4 | 461.7 | 44.4         | 20            | 175.0      |
| FSSO60508 | 20"    | 812.8 | 88.9  | 609.6 | 723.9 | 127.0 | 6.3 | 584.2 | 513.0 | 44.4         | 24            | 232.0      |
| FSSO60609 | 24"    | 939.8 | 101.6 | 717.5 | 838.2 | 139.7 | 6.3 | 692.1 | 615.9 | 50.8         | 24            | 330.0      |