
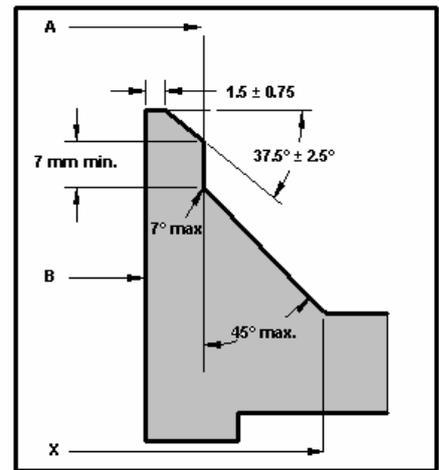


WELDING NECK FLANGES

STD 600 Lbs
ANSI / ASME B 16.5

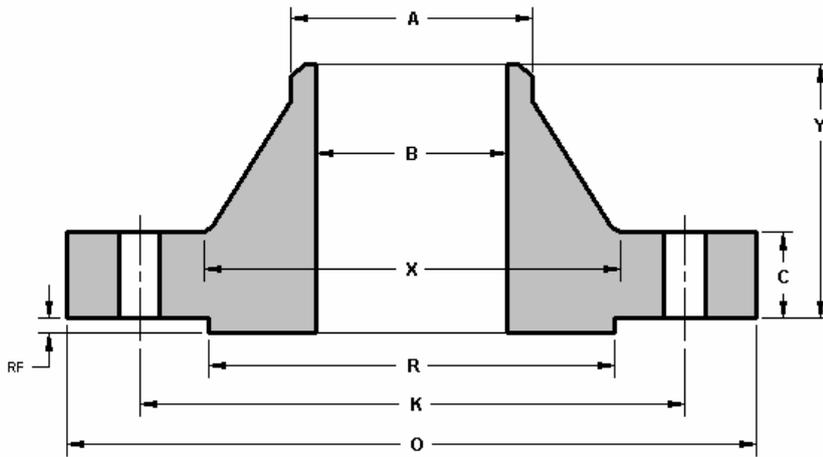

Dimensions are in mm.

| Cod. | DN | O | C | X | A | K | Y | RF | R | B STD | Ø FORI HOLES | N. FORI HOLES | Kg. APPROX |
|-----------|--------|-------|-------|-------|-------|-------|-------|-----|-------|----------|--------------------|---------------------|---------------|
| FSWN60021 | 1/2 | 95.2 | 14.2 | 38.1 | 21.3 | 66.5 | 52.3 | 6.3 | 35.0 | 15.7 | 15.7 | 4 | 0.9 |
| FSWN60027 | 3/4 | 117.3 | 15.7 | 47.7 | 26.6 | 82.5 | 57.1 | 6.3 | 42.9 | 20.8 | 19.0 | 4 | 1.5 |
| FSWN60033 | 1" | 123.9 | 17.5 | 53.8 | 33.5 | 88.9 | 61.9 | 6.3 | 50.8 | 26.6 | 19.0 | 4 | 1.9 |
| FSWN60042 | 1" 1/4 | 133.3 | 20.5 | 63.5 | 42.1 | 98.5 | 66.5 | 6.3 | 63.5 | 35.0 | 19.0 | 4 | 2.6 |
| FSWN60048 | 1" 1/2 | 155.4 | 22.3 | 69.8 | 48.2 | 114.3 | 69.8 | 6.3 | 73.1 | 40.8 | 22.3 | 4 | 3.3 |
| FSWN60060 | 2" | 165.1 | 25.4 | 84.0 | 60.4 | 127.0 | 73.1 | 6.3 | 91.9 | 52.4 | 19.0 | 8 | 4.7 |
| FSWN60073 | 2" 1/2 | 190.5 | 28.4 | 100.0 | 73.1 | 149.3 | 79.2 | 6.3 | 104.6 | 62.7 | 22.3 | 8 | 6.5 |
| FSWN60089 | 3" | 209.5 | 31.7 | 117.3 | 88.9 | 168.1 | 82.5 | 6.3 | 127.0 | 77.9 | 22.3 | 8 | 8.7 |
| FSWN60114 | 4" | 273.0 | 38.1 | 152.4 | 114.3 | 215.9 | 101.6 | 6.3 | 157.2 | 102.3 | 25.4 | 8 | 18.1 |
| FSWN60141 | 5" | 330.2 | 44.4 | 188.9 | 141.2 | 266.7 | 114.3 | 6.3 | 185.6 | 128.2 | 28.4 | 8 | 30.5 |
| FSWN60168 | 6" | 355.6 | 47.7 | 222.2 | 168.4 | 292.1 | 117.3 | 6.3 | 215.9 | 154.1 | 28.4 | 12 | 36.2 |
| FSWN60219 | 8" | 419.1 | 55.6 | 273.0 | 219.2 | 349.2 | 133.3 | 6.3 | 269.7 | 202.7 | 31.7 | 12 | 56.5 |
| FSWN60273 | 10" | 508.0 | 63.5 | 342.9 | 273.0 | 431.8 | 152.4 | 6.3 | 323.8 | 254.5 | 35.0 | 16 | 91.0 |
| FSWN60323 | 12" | 558.8 | 66.5 | 400.0 | 323.8 | 488.9 | 155.4 | 6.3 | 381.0 | | 35.0 | 20 | 105.0 |
| FSWN60355 | 14" | 603.2 | 69.8 | 431.8 | 355.6 | 527.0 | 165.1 | 6.3 | 412.7 | | 38.1 | 20 | 127.0 |
| FSWN60406 | 16" | 685.8 | 76.2 | 495.3 | 406.4 | 603.2 | 177.8 | 6.3 | 469.9 | | 41.1 | 20 | 178.0 |
| FSWN60455 | 18" | 742.9 | 82.5 | 546.1 | 457.2 | 654.0 | 184.1 | 6.3 | 533.4 | | 44.4 | 20 | 216.0 |
| FSWN60508 | 20" | 812.8 | 88.9 | 609.6 | 508.0 | 723.9 | 190.5 | 6.3 | 584.2 | | 44.4 | 24 | 268.0 |
| FSWN60609 | 24" | 939.8 | 101.6 | 717.5 | 609.6 | 838.2 | 203.2 | 6.3 | 692.1 | | 50.8 | 24 | 380.0 |