


# BLIND FLANGES

400 Lbs

ANSI / ASME B 16.5

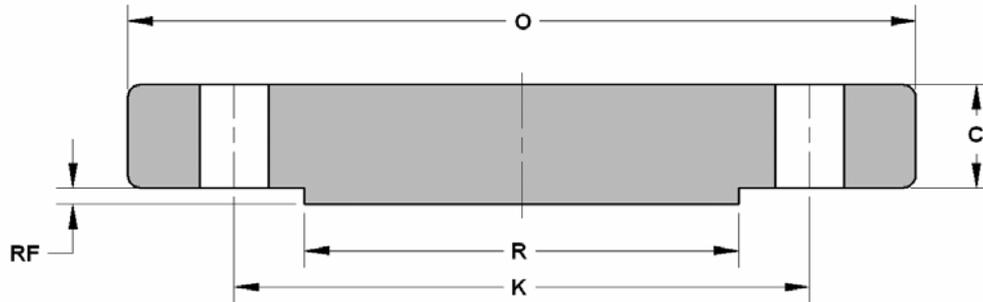

Dimensions are in mm.

Cod.	DN	O	C	K	RF	R	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSBL40021	1/2								
FSBL40027	3/4								
FSBL40033	1"								
FSBL40042	1"1/4								
FSBL40048	1"1/2								
FSBL40060	2"								
FSBL40073	2"1/2								
FSBL40089	3"								
FSBL40114	4"	254.0	35.0	200.1	6.3	157.2	25.4	8	14.0
FSBL40141	5"	279.4	38.1	234.9	6.3	185.6	25.4	8	19.0
FSBL40168	6"	317.5	41.1	269.7	6.3	215.9	25.4	12	26.0
FSBL40219	8"	381.0	47.7	330.2	6.3	269.7	28.4	12	43.0
FSBL40273	10"	444.5	53.8	387.3	6.3	323.8	31.7	16	65.0
FSBL40323	12"	520.7	57.1	450.8	6.3	381.0	35.0	16	95.0
FSBL40355	14"	584.2	60.4	514.3	6.3	412.7	35.0	20	126.0
FSBL40406	16"	647.7	63.5	571.5	6.3	469.9	38.1	20	163.0
FSBL40455	18"	711.2	66.5	628.6	6.3	533.4	38.1	24	206.0
FSBL40508	20"	774.7	69.8	685.8	6.3	584.2	41.1	24	270.0
FSBL40609	24"	914.4	76.2	812.8	6.3	692.1	42.7	24	410.0