


# Socketlet

90/10 Copper Nickel UNS C7060X

**EEMUA 234:2015 Chapter 12**  
**(Formerly EEMUA 146/6)**

Also available as a Capillary fitting.

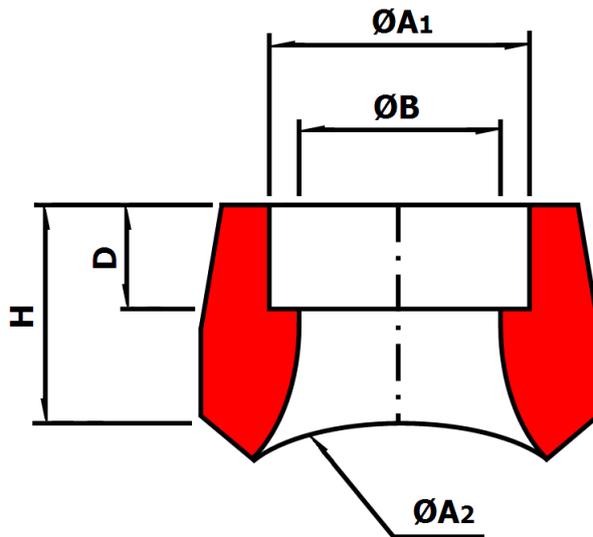

Nominal Size (Inch)	Actual Size (mm)	$\text{ØA2}$ (mm)	$\text{ØA1}$ (mm)	$\text{ØB}$ (mm)	H (mm)	D (mm)	Weight (Kg)
1/2	<b>16</b>	25 to 44.5	16.1	12	25.4	10	0.1
1/2	<b>16</b>	57 to 914	16.1	12	23.8	10	0.1
3/4	<b>25</b>	30 to 44.5	25.1	21	26.9	13	0.13
3/4	<b>25</b>	57 to 914	25.1	21	25.4	13	0.13
1	<b>30</b>	38 to 44.5	30.1	25	33.3	13	0.22
1	<b>30</b>	57 to 914	30.1	25	28.6	13	0.22
1.1/4	<b>38</b>	57 to 914	38.1	33	33.3	13	0.35
1.1/4	<b>38</b>	57 to 914	38.1	33	33.3	13	0.35
1.1/2	<b>44.5</b>	57 to 914	44.6	39.5	30.2	13	0.5
1.1/2	<b>44.5</b>	57 to 914	44.6	39.5	30.2	13	0.5
2	<b>57</b>	76.1 to 914	57.3	52	38.1	16	0.9
2	<b>57</b>	76.1 to 914	57.3	52	38.1	16	0.9