
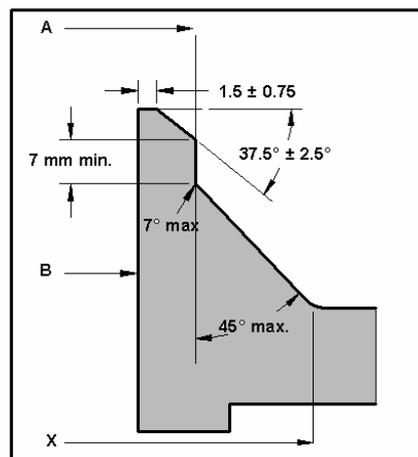


WELDING NECK FLANGES

STD 300 Lbs

ANSI / ASME B 16.5

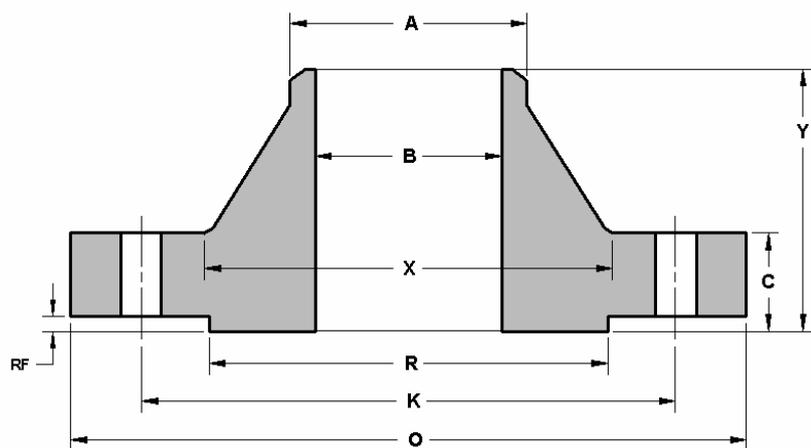

Dimensions are in mm.

Cod.	DN	O	C	X	A	K	Y	RF	R	B STD	Ø FORI HOLES	N. FORI HOLES	Kg. APPROX
FSWN30021	1/2	95.2	14.2	38.1	21.3	66.5	52.3	1.5	35.0	15.7	15.7	4	0.9
FSWN30027	3/4	117.3	15.7	47.7	26.6	82.5	57.1	1.5	42.9	20.8	19.0	4	1.5
FSWN30033	1"	123.9	17.5	53.8	33.5	88.9	61.9	1.5	50.8	26.6	19.0	4	1.9
FSWN30042	1" 1/4	133.3	19.0	63.5	42.1	98.5	65.0	1.5	63.5	35.0	19.0	4	2.6
FSWN30048	1" 1/2	155.4	20.5	69.8	48.2	114.3	68.3	1.5	73.1	40.8	22.3	4	3.3
FSWN30060	2"	165.1	22.3	84.0	60.4	127.0	69.8	1.5	91.9	52.4	19.0	8	3.6
FSWN30073	2" 1/2	190.5	25.4	100.0	73.1	149.3	76.2	1.5	104.6	62.7	22.3	8	5.4
FSWN30089	3"	209.5	28.4	117.3	88.9	168.1	79.2	1.5	127.0	77.9	22.3	8	7.4
FSWN30114	4"	254.0	31.7	146.0	114.3	200.1	85.8	1.5	157.2	102.3	22.3	8	11.9
FSWN30141	5"	279.4	35.0	177.8	141.2	234.9	98.5	1.5	185.6	128.2	22.3	8	16.0
FSWN30168	6"	317.5	36.5	206.2	168.4	269.7	98.5	1.5	215.9	154.1	22.3	12	20.2
FSWN30219	8"	381.0	41.1	260.3	219.2	330.2	111.2	1.5	269.7	202.7	25.4	12	31.0
FSWN30273	10"	444.5	47.7	320.5	273.0	387.3	117.3	1.5	323.8	254.5	28.4	16	44.3
FSWN30323	12"	520.7	50.8	374.6	323.8	450.8	130.0	1.5	381.0		31.7	16	64.0
FSWN30355	14"	584.2	53.8	425.4	355.6	514.3	142.7	1.5	412.7		31.7	20	88.0
FSWN30406	16"	647.7	57.1	482.6	406.4	571.5	146.0	1.5	469.9		35.0	20	113.0
FSWN30455	18"	711.2	60.4	533.4	457.2	628.6	158.7	1.5	533.4		35.0	24	134.0
FSWN30508	20"	774.7	63.5	587.2	508.0	685.8	162.0	1.5	584.2		35.0	24	171.0
FSWN30609	24"	914.4	69.8	701.5	609.6	812.8	168.1	1.5	692.1		41.1	24	238.0